

KIJO

JM12-70



JM Series lead-acid battery

Applications


- > UPS/EPS
- > Power systems
- > Telecommunications system
- > Emergency lighting、Auto control system
- > Solar/wind generating storage cyclic
- > Other general purpose

General Features

- > High corrosion resistant performance: Pb-Ca multi-alloy grid
- > High energy density and power density
- > Optimized capability of instant high-current discharging
- > Excellent charge acceptance ability
- > Excellent deep cycle discharge capability
- > Strong high and low temperature performance
- > Precision sealing technology
- > Long life



Dimension: 260(L) × 168(W) × 212(H) × 215(TH) Unit: mm

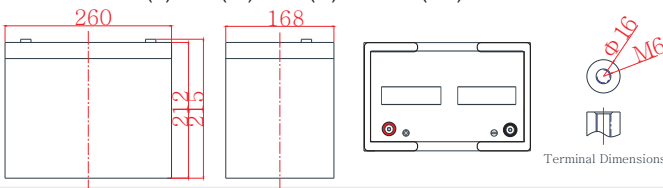

Specification

Nominal Voltage	12V
Nominal Capacity	70Ah
Design life	10 years
Terminal	M6
Approx. Weight	Approx 21.8kg (48.1lbs)
Container Material	ABS
Rated Capacity	70.0Ah → 10Hour Rate (7.00A to 10.8V)
	56.4Ah → 3Hour Rate (18.8A to 10.8V)
	45.8Ah → 1Hour Rate (45.8A to 10.5V)
Internal resistance	Full charged at 25°C: 7.0 mΩ
Max. Discharge Current	840A(5S)
Operating Temperature	Discharge: -20 ~50°C (-4~ 122°F)
	Charge: -20 ~50 °C (-4~ 122°F)
	Storage: -20 ~50°C (-4~ 122°F)
Charge current:	Max. 17.5A ; Recom.7.0A
Charge Method (25 °C)	Float Charge: 13.5-13.8V, recom.13.5V(-18mV/ °C)
	Equalize charge:13.8-14.1V, recom.14.1V(-24mV/ °C)
	Cycle charge:14.4-15.0V, recom.14.4V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	247	133	80.6	47.1	27.0	19.6	13.2	8.65	7.28	3.82
1.65V	239	128	79.2	46.9	26.9	19.4	13.0	8.58	7.21	3.80
1.70V	230	126	77.9	46.5	26.7	19.1	12.9	8.51	7.14	3.78
1.75V	211	122	77.2	45.8	26.3	18.9	12.8	8.44	7.07	3.77
1.80V	189	113	73.8	44.7	25.8	18.8	12.4	8.37	7.00	3.75
1.85V	169	101	67.4	41.4	24.5	17.7	11.8	8.02	6.79	3.68


Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	414	233	146	89.1	51.1	37.3	25.0	16.8	14.0	7.56
1.65V	398	229	144	88.4	51.0	36.8	24.8	16.7	13.9	7.53
1.70V	396	227	144	87.7	50.8	36.6	24.6	16.6	13.7	7.49
1.75V	369	225	144	87.1	50.5	36.4	24.5	16.5	13.6	7.46
1.80V	339	213	140	86.4	50.4	36.3	24.2	16.3	13.4	7.42
1.85V	303	190	129	80.2	48.1	34.5	23.1	15.8	13.2	7.35


Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

JM12-70


Discharge characteristic

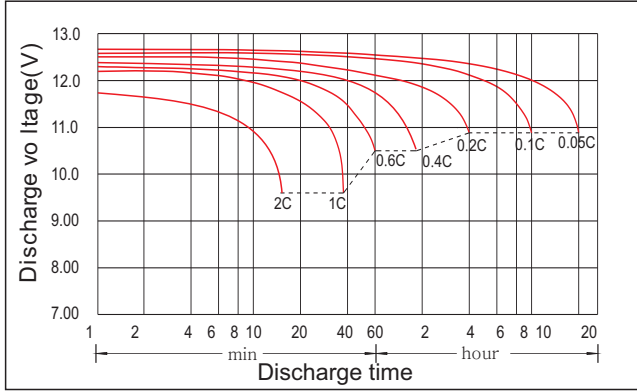


Charging characteristic

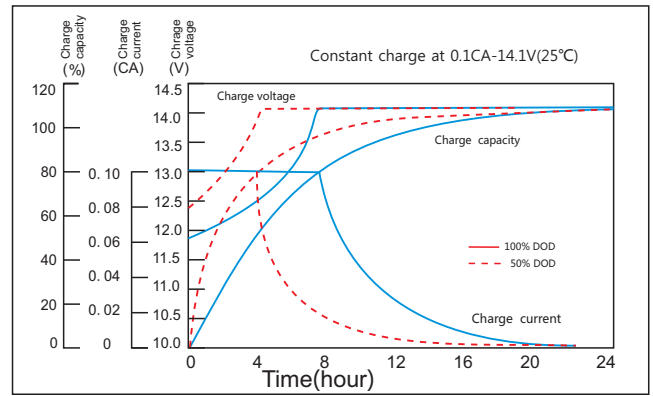


The effect of temperature on capacity

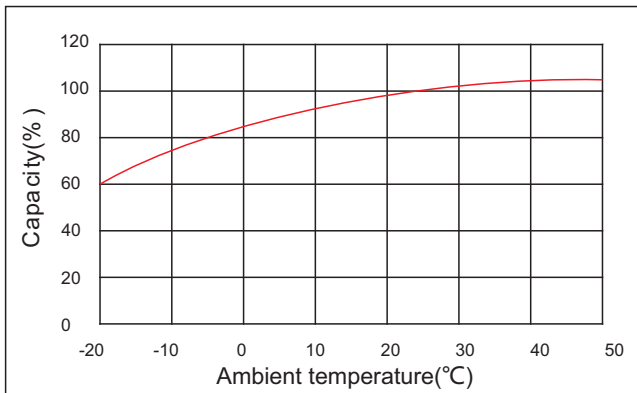

The effect of discharge depth on cycle life

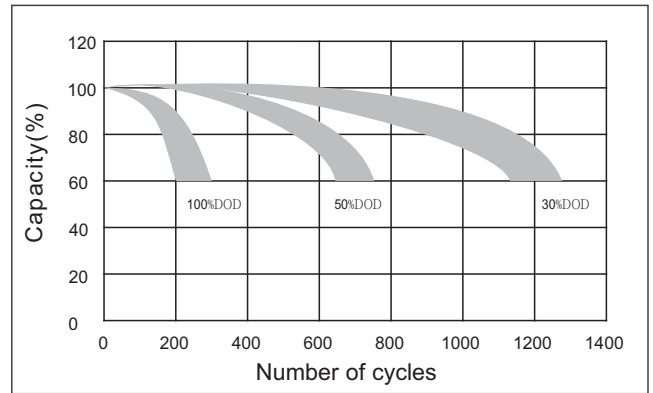

Curves of self-discharge

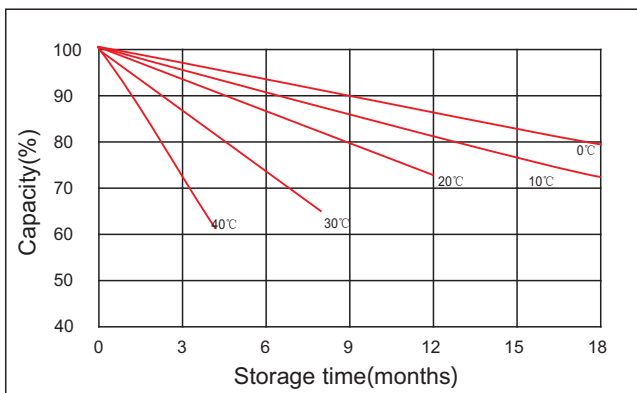

The effect of temperature on float life

